

PHONOLYT® Leidingvastpunten

Single set, galvanized

Application

- The ideal building block for sound-decoupling fastening at sound norms according to DIN 4109 and VDI 4100
- Ideal for the fastening of pipes on wall, ceiling and floor
- Fastening of pipes and channels at mounting on the floor
- Suitable as sound-decoupling fastening point for rising pipes

Your advantages


- Separates the pipe acoustically from the building body and reduces the contact noise to a maximum of 40 dB(A)
- The thought-through construction makes the mounting easy
- Functional construction for 2-point fastening of the pipe
- Extra special feature: also approved for alternating load directions for plastic pipes
- Gapless adjustable wall distance
- Free of silicones



The data



Type	dB(A) 27	dB(A) 40
Leveringsomvang	1 PHONOLYT® dB(A) 27, M10 2 schroefbuisclampen, 30 x 3 mm, zonder inlegstrip, zware uitvoering, M10, gegalvaniseerd 2 draadeinden M10 4 zeskantmoeren M10	1 PHONOLYT® dB(A) 40, M12 2 schroefbuisclampen, 30 x 3 mm, zonder inlegstrip, zware uitvoering, M12, gegalvaniseerd 2 draadeinden M12 4 zeskantmoeren M12

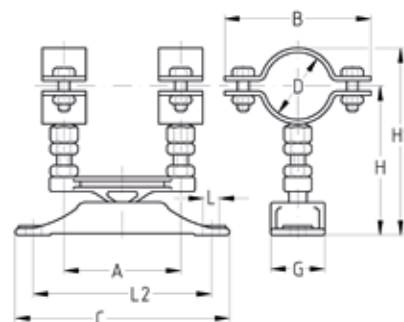

Type	Maat [Inch]	Maat [mm]	Klembereik [mm]	Draadeinden	Afmetingen [mm]								Artikelnr.	Verp. eenheid	Eenheid
dB(A) 27	3/8"		14 - 18	M10 x 35 mm	80	66	147	37	81	92	11	122	120348	1	Stuk
	1/2"		20 - 22			71			84	97			120340		
	3/4"		25 - 28			74			87	104			120344		
	1"		31 - 35			83			90	110			120308		
	1 1/4"		40 - 43	M10 x 55 mm		92			94	119			120304		
	1 1/2"		48 - 52			100			99	128			120316		
		57	53 - 57			105			120	150			120332		
dB(A) 40	1"		31 - 35	M12 x 50 mm	126	83	227	60	123	143	13	194	120312		
	1 1/4"		40 - 43			92			127	151			120324		
	1 1/2"		48 - 52			100			132	161			120320		
		57	53 - 57			105			135	165			120336		
	2"		58 - 61			110			137	170			120328		

See the main section „Technical information“ for the allowable load values.